


ESA Series

3-10kW/5-48kWh | Single Phase Home Storage Solution (HV)

The GoodWe ESA Series is a fully integrated all-in-one solar and storage solution that combines inverter and battery in a pre-wired, modular design-making installation significantly faster and easier. Engineered for flexibility, the ESA system allows seamless expansion to meet evolving energy needs, with scalable battery capacity for future upgrades. With its streamlined setup, the ESA Series can reduce installation time by up to 50%, making it an ideal choice for efficient and adaptable residential energy systems. It also supports dynamic tariff optimization with AI-driven EMS.

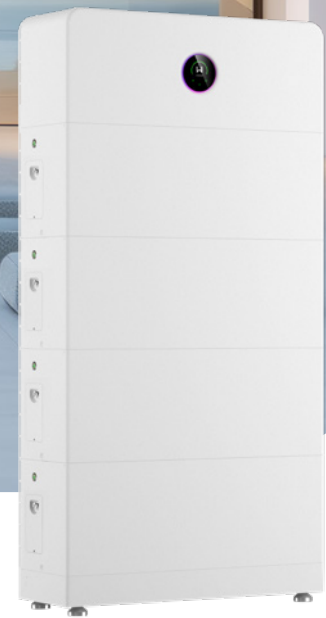

*Initial stock may be supplied in a gloss white finish.



Optimized Performance

- 1C charge/discharge for rapid energy cycling
- Fanless design for quiet operation, noise <30dB
- 20A per string & 200% PV oversizing



Superb Safety & Reliability

- Advanced 6-layer safety protection
- Heating mode ensures reliable performance even in -20°C
- AI-driven AFCI 3.0 for safety¹



Flexible & Adaptable Applications

- Dual output ports for simplified installation & off-grid capability
- Flexible battery mixing with different capacity or old&new batteries
- Support full backup load with 63A×5 output



Smart Control & Monitoring

- Ready for AI-driven EMS
- Seamless switching to backup <4ms
- One-click upgrade & one-click configuration

Technical Data	GW3K- EHA-G20	GW3.6K- EHA-G20	GW5K- EHA-G20	GW6K- EHA-G20	GW8K- EHA-G20	GW9.999K- EHA-G20	GW10K- EHA-G20
Battery Side							
Battery Type	LiFePO ₄						
Nominal Battery Voltage (V)	380						
Battery Voltage Range (V)	350 ~ 550						
Start-up Voltage (V) ¹	380						
Number of Battery Input	1						
Max. Continuous Charging Current (A)	11.9	14.3	19.8	23.7	31.6	35.6	35.6
Max. Continuous Discharging Current (A)	8.7	10.5	14.5	17.4	23.2	29.0	29.0
Max. Charging Power (kW)	4.5	5.4	7.5	9.0	12.0	13.5	13.5
Max. Discharging Power (kW)	3.3	3.96	5.5	6.6	8.8	11.0	11.0
PV Side							
Max. Input Power (kW)	6.0	7.2	10.0	12.0	16.0	20.0	20.0
Max. Input Voltage (V) ²	600						
MPPT Operating Voltage Range (V) ³	40 ~ 560						
Start-up Voltage (V)	50						
Nominal Input Voltage (V)	400						
Max. MPPT Current (A)	20						
Max. MPPT Short Circuit Current (A)	26						
Number of MPPTs	2	2	2	2	4	4	4
Number of Strings per MPPT	1/1	1/1	1/1	1/1	1/1/1/1	1/1/1/1	1/1/1/1
AC Side (On-grid)							
Nominal Power (kW)	3.0	3.6	5.0	6.0	8.0	9.999	10.0
Nominal Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999	10.0
Max. Apparent Power to Grid (kVA)	3.0	3.6	5.0	6.0	8.0	9.999	10.0
Max. Apparent Power from Grid (kVA) ⁴	6.0	7.2	10.0	12.0	14.5	14.5	14.5
Nominal Voltage (V)	220 / 230 / 240, L / N / PE						
Voltage Range (V)	170 ~ 280						
Nominal Frequency (Hz)	50 / 60						
Frequency Range (Hz)	45 ~ 55 / 55 ~ 65						
Max. Current to Grid (A)	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V
Max. Current From Grid (A) ⁴	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	32.8 @ 220V 31.4 @ 230V 30.0 @ 240V	45.5 @ 220V 43.5 @ 230V 41.7 @ 240V	50.0 @ 220V 50.0 @ 230V 50.0 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V	63.0 @ 220V 63.0 @ 230V 60.5 @ 240V
Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)						
THDi	<3%						
Back-up Side							
Nominal Output Apparent Power (kVA)	3.0	3.6	5.0	6.0	8.0	10.0	10.0
Max. Output Apparent Power (kVA)	3.0 (6.0, 10s)	3.6 (7.2, 10s)	5.0 (10.0, 10s)	6.0 (12.0, 10s)	8.0 (16.0, 10s)	10.0 (20.0, 10s)	10.0 (20.0, 10s)
Max. Output Apparent Power (Bypass) (kVA)	6.0	7.2	10.0	12.0	14.5	14.5	14.5
Max. Output Current (A) ⁵	13.7 @ 220V 13.1 @ 230V 12.5 @ 240V	16.4 @ 220V 15.7 @ 230V 15.0 @ 240V	22.8 @ 220V 21.8 @ 230V 20.9 @ 240V	27.3 @ 220V 26.1 @ 230V 25.0 @ 240V	36.4 @ 220V 34.8 @ 230V 33.4 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V	43.5 @ 220V 43.5 @ 230V 41.7 @ 240V
Max. Output Current (Bypass) (A) ⁵	27.3						
Nominal Output Voltage (V)	220 / 230 / 240, L / N / PE						
Nominal Output Frequency (Hz)	50 / 60						
THDv (@Linear Load)	<3%						
Efficiency							
Max. Efficiency	97.6%	97.6%	97.6%	97.6%	97.5%	97.5%	97.5%
European Efficiency	96.5%	96.5%	96.8%	97.0%	96.8%	96.8%	96.8%
Max. Battery to AC Efficiency	98.0%	98.0%	98.0%	98.0%	97.8%	97.8%	97.8%
Protection							
PV String Current Monitoring	Integrated						
PV Insulation Resistance Detection	Integrated						
Residual Current Monitoring	Integrated						
PV Reverse Polarity Protection	Integrated						
Battery Reverse Polarity Protection	Integrated						
Anti-islanding Protection	Integrated						
AC Overcurrent Protection	Integrated						
AC Short Circuit Protection	Integrated						
AC Overvoltage Protection	Integrated						
DC Surge Protection	Type II						
AC Surge Protection	Type II						
RSD	Optional						
AFCI	Integrated						
Remote Shutdown	Integrated						
General Data							
Operating Temperature Range (°C)	-35 ~ +60 (Derating at +40)						
Relative Humidity	0 ~ 95%						
Max. Operating Altitude (m)	4000 (>2000 derating)						
Cooling Method	Natural convection						
User Interface	LED, WLAN + APP						
Communication with BMS	CAN						
Communication	RS485, WiFi + LAN + Bluetooth						
Communication Protocols	Modbus-RTU, Modbus-TCP						
Weight (kg)	24	24	24	24	26	26	26
Dimension (W x H x D mm)	800 x 300 x 270						
Noise Emission	≤30	≤30	≤30	≤30	≤35	≤35	≤35
Topology	Non-isolated						
Ingress Protection Rating	IP66						
Mounting Method	Wall / Floor Mounted						

*1: If there's no PV, start-up voltage will be 380V.

*2: When the input voltage is 560V-600V, the inverter will enter standby mode, and the voltage returns to 560V to enter the normal operation state.

*3: Please refer to the user manual for the MPPT Voltage Range at Nominal Power.

*4: GOODWE ESA series has internal bypass 63A passthrough ability to support whole home backup solution. If the customer don't want to do any breaker upgrade, the main breaker size in SolarGo (or SEMS+) can be set as previous breaker size.

*5: If the Back-up port is not used, select an appropriate circuit breaker based on the AC Max. Output Current.

*: Please visit GoodWe website for the latest certificates.

Technical Data	GW5.1-BAT-D-G20	GW8.3-BAT-D-G20	GW5.1-BAT-D-G21	GW8.3-BAT-D-G21
Rated Energy (kWh)	5.12	8.32	5.12	8.32
Usable Energy (kWh) ^{*1}	5	8	5	8
Battery Type	LFP (LiFePO ₄)			
Operating Voltage Range (V) (single phase system)	350 ~ 550			
Operating Voltage Range (V) (three phase system)	700 ~ 950			
Max. Input Current (System) (A)	12	19	12	19
Max. Output Current (System) (A)	13.2	21.0	13.2	21.0
Max. Input Power (System) (kW) ^{*2}	5	8	5	8
Max. Output Power (System) (kW) ^{*2}	5	8	5	8
Peak.Output Power (System) (kW) ^{*2}	7.5 @ 10s	12 @ 10s	7.5 @ 10s	12 @ 10s
Charging Temperature Range (°C)	-18 ~ +55	-18 ~ +55	+2 ~ +55	+2 ~ +55
Discharging Temperature Range (°C)	-20 ~ +55			
Relative Humidity	5 - 95%			
Max. Operating Altitude (m)	4000			
Noise Emission (dB)	≤29			
Communication	CAN			
Weight (kg)	57.5 ± 1	79.0 ± 1	57.5 ± 1	79.0 ± 1
Dimensions (W × H × D mm)	800 × 326 × 270			
Optional Function Configuration	Heating	Heating	-	-
Ingress Protection	IP66			
Max. Storage Time	12 months (-20°C ~ +35°C) 6 months (+35°C ~ +45°C)			
Scalability	6 pcs			
Mounting Method	Floor stacked / Wall-mounted			
Standard and Certification	Safety	IEC62619, IEC60730, EN62477, IEC63056, IEC62040, CE, CEC, VDE2510		
	EMC	CE, RCM		
	Transportation	UN38.3, ADR		

*1: Test conditions, 100% DOD (cell 2.85 ~ 3.6V voltage range), 0.2P charge & discharge at 25 ± 2°C for battery system at the beginning of life. Usable energy is defined by its initial design value. Actual available energy may vary depending on charge / discharge rate, environmental conditions (e.g. temperature), transport and storage factors.

*2: Max. Input Power / Max. Output Power / Peak.Output Power derating will occur related to Temperature and SOC.

*: Please visit GoodWe website for the latest certificates.



Number of Battery Modules (pcs)	1	2	3	4	5	6
Total Energy Capacity (kWh)	5.12	10.24	15.36	20.48	25.60	30.72
Total Energy Capacity (kWh)	8.32	16.64	24.96	33.28	41.60	49.92